


PLAN

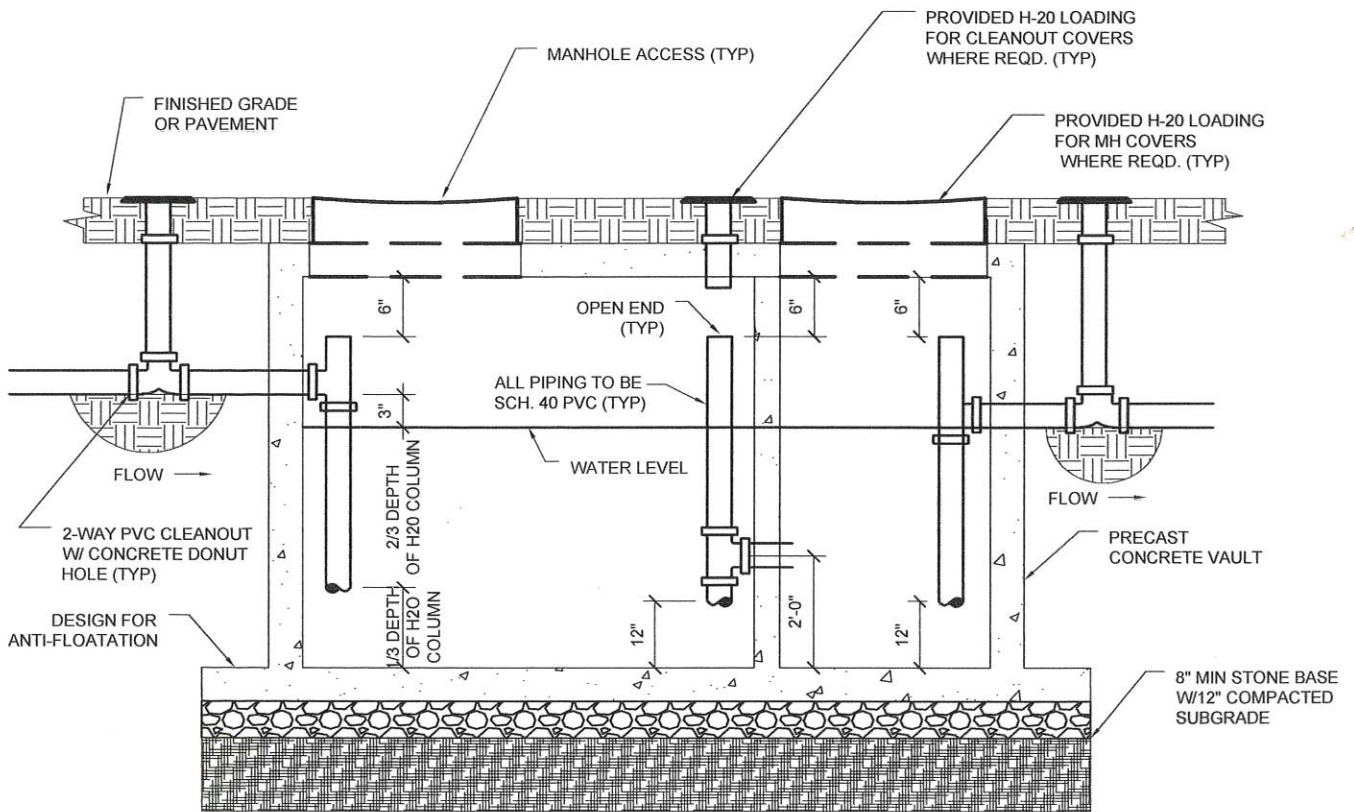

PROFILE

NOTES:

1. USE NON-SHRINK GROUT AT ALL PENETRATIONS
2. PROVIDE BUTYL RUBBER SEAL BETWEEN ALL SECTIONS AND TOP

LIQUID CAPACITY [GALLONS]	WIDTH (W)	LENGTH (L)
500	4'-0"	6'-0"
750	4'-0"	8'-1"
1000	5'-1"	8'-2"
1200	5'-9"	8'-6"
1500	5'-7"	10'-8"
2000	4'-11"	15'-11"

NTS



GREASE INTERCEPTOR

PROJ. NO. 1410

FIGURE
D-1

DATE: 05/07/2015